




The Innovators of Quality Framing and Lath Systems

Z-Furring Channel Specification

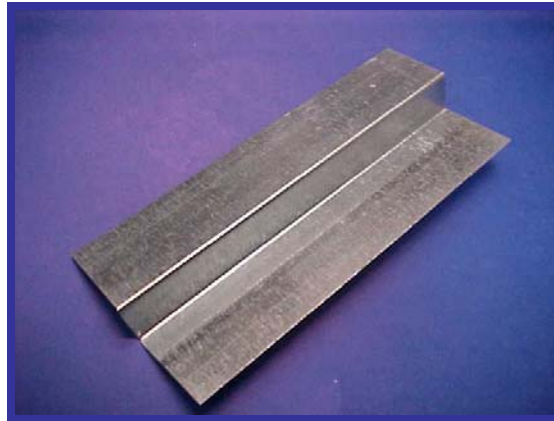

MAXIMUM BLANK SIZE	MINIMUM LEG SIZE	MAXIMUM LENGTH	STEEL THICKNESS (ga)
22"	7/8"	21'	12,14,16,18,20 & 25

CEMCO Z - Furring Channel is fabricated from hot-dipped galvanized steel complying with ASTM A653 with a minimum G40 coating meeting ASTM A924. The furring channel is fabricated from minimum 25 gauge (0.0179-inch-thick) steel (uncoated). The channel is manufactured in various web depths and leg lengths (attachable flange).

CALIFORNIA EXPANDED METAL LATH PRODUCTS CO.

Corporate Office
263 N. Covina Lane,
City of Industry, CA 91744
Phone (800) 775-2362
Fax (626) 330-7598

1001-A Pittsburg Antioch Hwy,
Pittsburg, CA 94565
Phone (925) 473-9340
Fax (925) 473-9341

490 Osage Street,
Denver, CO 80204
Phone (303) 572-3626
Fax (303) 572-3627

www.cemcosteel.com