


#66 EXPANDED FLANGE CASING BEAD

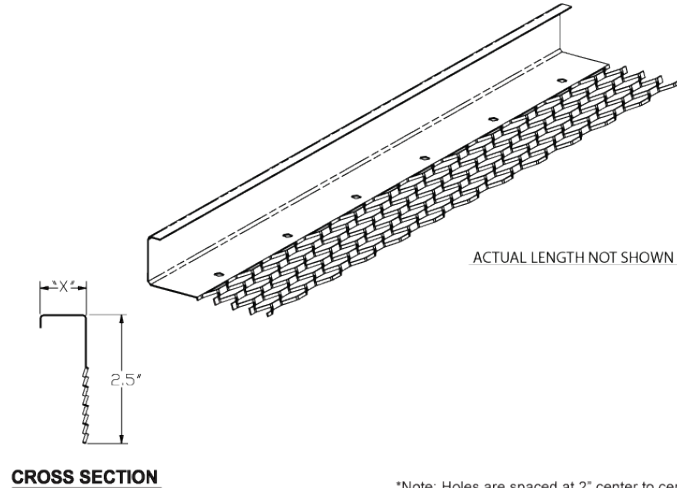

ACTUAL LENGTH NOT SHOWN

*Note: Holes are spaced at 2" center to center.

ASTM's and Code Standards

- ASTM A653
- ASTM A924
- ASTM B69 (True Zinc)
- ASTM C1047
- Fed. Spec. QQ-S-775-D
- 2007 CBC
- 2006 IBC

LEED Points and Recycled Content

By using CEMCO metal lath products, your project can contribute to earning LEED points for:

- LEED MR 2.1 and 2.2: Construction Waste Management: Up to 2 points.
- LEED MR 4.1 and 4.2: Recycled Content: Up to 2 points.
- LEED MR 5.1 and 5.2: Regional materials

CEMCO metal lath products contain 30% to 35% recycled steel.

These products are produced from steel consisting of the following contents:

- Total Recycled Content: 32.9%
- Post-Consumer Content: 25.6%
- Pre-Consumer Content: 6.8%
- CEMCO can provide higher recycled content based on blending steel.
Please refer to SSMA Tech dated May 2009 to calculate recycled content on blended steel.
- Link to SSMA Tech Note dated May 2009 on LEED® 2.2 Credits for Cold-Formed Steel Framing
Manufacturers: <http://www.ssma.com/documents/TNO6%20SSMA%20LEED%202.2.pdf>

CEMCO's #66 expanded flange casing bead formed to a 90° for applications at inside corners. Absorbs movement due to expansion and contraction of plastered walls. Provided with an expanded flange for proper keying and easy application.

Packaging

Size	Pcs./Ctn.	Length	Ft. /Ctn.	Wt. /Ctn.	Ctn./Plt.
1/4"	30	10'	300'	42 lbs.	42
3/8"	30	10'	300'	48 lbs.	42
1/2"	30	10'	300'	55 lbs.	42
3/4"	30	10'	300'	58 lbs.	42
7/8"	30	10'	300'	62 lbs.	42
1"	30	10'	300'	64 lbs.	42
1-1/4"	30	10'	300'	68 lbs.	42



Technical Services

For more technical information about this and other CEMCO products, contact Technical Services at 800.416.2278

Project Information

Name: _____
Project: _____

Contractor Information

Name: _____
Contact: _____
Phn: _____ FAX: _____

Architect Information

Name: _____
Contact: _____
Phn: _____ FAX: _____