



Steel Framing and Metal Lath


Corporate Headquarters
263 N. Covina Lane
City of Industry, CA 91744
Phone: 800.775.2362 | Fax: 626.330.7598
www.cemcosteel.com

Manufacturing Facilities
City of Industry, CA
Denver, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design
1001-A Pittsburg Antioch Hwy
Pittsburg, CA 94565
Phone: 925.473.9340 | Fax: 925.473.9124

Technical Services
263 N. Covina Lane
City of Industry, CA 91744
Phone: 800.416.2278 | Fax: 626.249.5005

SELF FURRED METAL LATH (GROOVED)

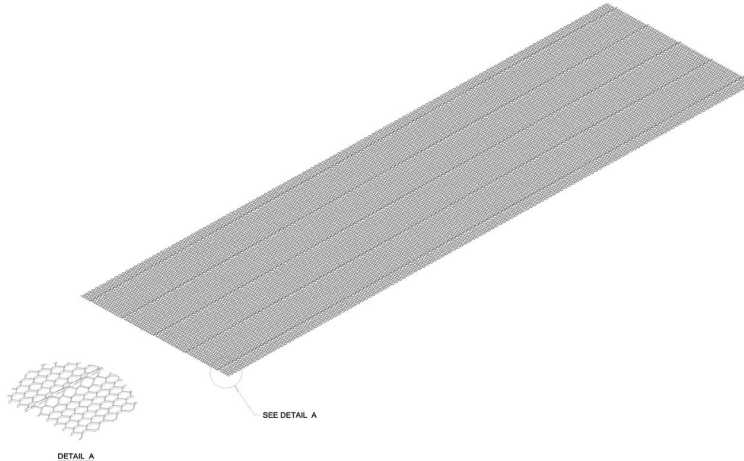

ASTM's and Code Standards

- ASTM A653
- ASTM A924
- ASTM C841 (Installation)
- ASTM C847
- ASTM C1063 (Installation)
- ICC ESR-1623
- Fed. Spec. QQ-1-101C
- U.S. HUD 4930.1

LEED Points and Recycled Content

By using CEMCO metal lath products, your project can contribute to earning LEED points for:

- LEED MR 2.1 and 2.2: Construction Waste Management: Up to 2 points.
- LEED MR 4.1 and 4.2: Recycled Content: Up to 2 points.
- LEED MR 5.1 & 5.2: Regional Materials

CEMCO cold-formed steel framing products contain 30% to 35% recycled steel.

These products are produced from steel consisting of the following contents:

- Total Recycled Content: 32.9%
- Post-Consumer Content: 25.6%
- Pre-Consumer Content: 6.8%
- CEMCO can provide higher recycled content based on blending steel. Please refer to SSMA Tech dated May 2009 to calculate recycled content on blended steel.
- Link to SSMA Tech Note dated May 2009 on LEED® 2.2 Credits for Cold-Formed Steel Framing
Manufacturers: <http://www.ssma.com/documents/TNO6%20SSMA%20LEED%202.2.pdf>

CEMCO's Self Furred Diamond Metal Lath "Grooved" is manufactured with 5 "V"-grooves in the lath in lieu of standard "dimples". These 5 grooves provide the necessary 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls. This lath is available with or without Grade D asphalt paper backing. All CEMCO expanded metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request.

Packaging

Wt./Sq. Yd. (lbs)	Sheet Size	Pcs./Bundle	Yds./Pallet
1.75	27" x 96"	10	1000
2.5	27" x 96"	10	1000
3.4	27" x 96"	10	1000

Note: 50 bundles per pallet



Technical Services

For more technical information about this and other CEMCO products, contact Technical Services at 800.416.2278

Project Information

Name: _____
Project: _____

Contractor Information

Name: _____
Contact: _____
Phn: _____ FAX: _____

Architect Information

Name: _____
Contact: _____
Phn: _____ FAX: _____