




The Innovators of Quality Framing and Lath Systems

FLAT STRAP MEMBERS Specification

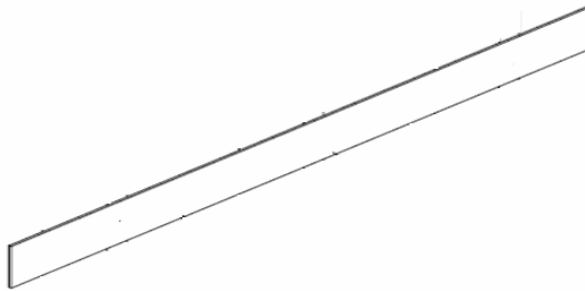

Strap Member length	Strap width	Gauge (Mils)
8 ft to 20 ft.	1" TO 22"	25, 20, 18, 16, 14, and 12 (18, 30, 33, 43, 54, 68 and 97)

CEMCO FLAT STRAP is available in various blank widths. The straps are available from hot-dipped galvanized steel complying with ASTM A653 Grade 33 with a G40 coating for 25 gauge, 0.0179 inch-thick (18 mil), 20 gauge, (0.0312-inch-thick (30 mil) or (0.0346 inch-thick (33 mil) and for 18 gauge, 0.0451 inch-thick (43 mil) uncoated steel and ASTM A653 Grade 50 with a minimum G60 coating for 16 gauge, 0.0566-inch-thick (54 mil), for 14 gauge, 0.0713 inch-thick (68 mil) and for 12 gauge, 0.1017 inch-thick, (97 mil) uncoated steel. G90 is available upon request. For lengths greater than 20 feet, strap is available in coil form.

CALIFORNIA EXPANDED METAL LATH PRODUCTS CO.

Corporate Office:

263 N Covina Lane,
City of Industry, CA 91744
Phone (800) 775-2362
Fax (626) 330-7598

1001-A Pittsburg Antioch Hwy,
Pittsburg, CA 94565
Phone (925) 473-9340
Fax (925) 473-9341

490 Osage Street,
Denver, CO 80204
Phone (303) 572-3626
Fax (303) 572-3627

www.cemcosteel.com