




The Innovators of Quality Framing and Lath Systems

CEMCO FAS Track DL2 Specification Sheet

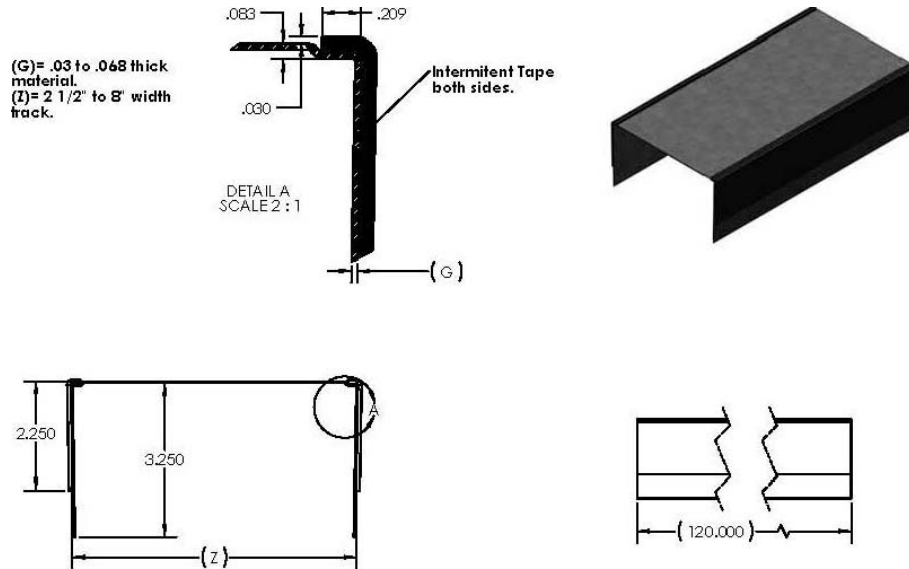

Track Member Width	Length	Gauge (mils)
2 1/2", 3 5/8", 4", 6", and 8"	10' 0"	20, 18, 16, and 14 GA (33, 43, 54, and 68 mil)

Drift slots on the web are optional.

CEMCO FAS Track DL2 is a deep leg deflection track that offers fire and air (smoke) protection. The section is fabricated from hot-dipped galvanized steel complying with ASTM A653, and ASTM A1003 Grade 33 Type H for 33 ksi yield strength steel for 20 and 18 gauges (33 and 43 mils) with a minimum G40 coating complying with ASTM A924; and Grade 50 Type H for 50 ksi yield strength steel for 16 and 14 gauges (54 and 68 mils) with a minimum G60 coating complying with ASTM A924. The FAS Track DL2 is manufactured with Blazeseal intumescent fire rated tape on the top portion of the leg wrapping the corner onto the back web of the track. The FAS Track DL2 is listed under Underwriters Laboratories for one and two hour rated head of wall assemblies.

CALIFORNIA EXPANDED METAL LATH PRODUCTS CO.

Corporate Office:

263 N. Covina Lane,
City of Industry, CA 91744
Phone (800) 775-2362
Fax (626) 330-7598

1001-A Pittsburg Antioch Hwy,
Pittsburg, CA 94565
Phone (925) 473-9340
Fax (925) 473-9341

490 Osage Street,
Denver, CO 80204
Phone (303) 572-3626
Fax (303) 572-3627

www.cemcosteel.com