




The Innovators of Quality Framing and Lath Systems

CEMCO Slotted Track “CST” Specification

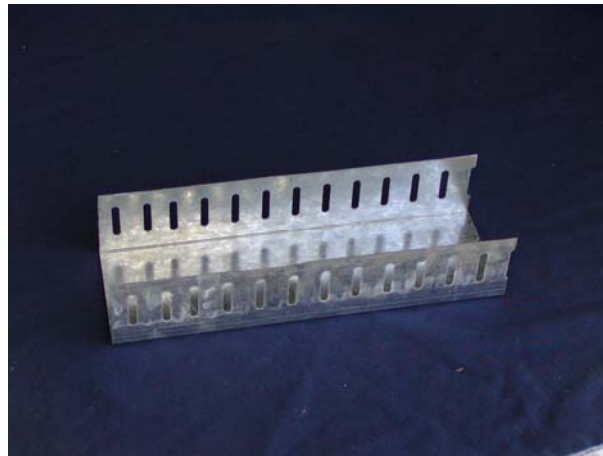

Track Member Depth	Leg Length (flange)	Gauge (mils)
2 1/2", 3 5/8", 4", 6", and 8"	2 1/2"	25, 20, 18, and 16 GA (18, 33, 43, and 54mil)

CEMCO Slotted Track (CST) member is used as vertical deflection track in interior non bearing wall assemblies. The U-shape track has 1 1/2" vertical slots spaced 1" along both legs. The track section is fabricated from hot-dipped galvanized steel complying with ASTM A653, with a minimum G40 coating. The framing members comply with ASTM C645. The slotted track is used for head-of-wall conditions with fire-resistive assemblies listed under the code and Gypsum Association Fire Resistance Design Manual.

CALIFORNIA EXPANDED METAL LATH PRODUCTS CO.

Corporate Office:
263 N. Covina Lane,
City of Industry, CA 91744
Phone (800) 775-2362
Fax (626) 330-7598

1001-A Pittsburg Antioch Hwy,
Pittsburg, CA 94565
Phone (925) 473-9340
Fax (925) 473-9341

490 Osage Street,
Denver, CO 80204
Phone (303) 572-3626
Fax (303) 572-3627

www.cemcosteel.com