



Steel Framing and Metal Lath


Corporate Headquarters
263 N. Covina Lane
City of Industry, CA 91744
Phone: 800.775.2362 | Fax: 626.330.7598
www.cemcosteel.com

Manufacturing Facilities
City of Industry, CA
Denver, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design
1001-A Pittsburg Antioch Hwy
Pittsburg, CA 94565
Phone: 925.473.9340 | Fax: 925.473.9124

Technical Services
263 N. Covina Lane
City of Industry, CA 91744
Phone: 800.416.2278 | Fax: 626.249.5005

1/8" Self-Furred Rib Lath with K-Paper (CEMMESH)

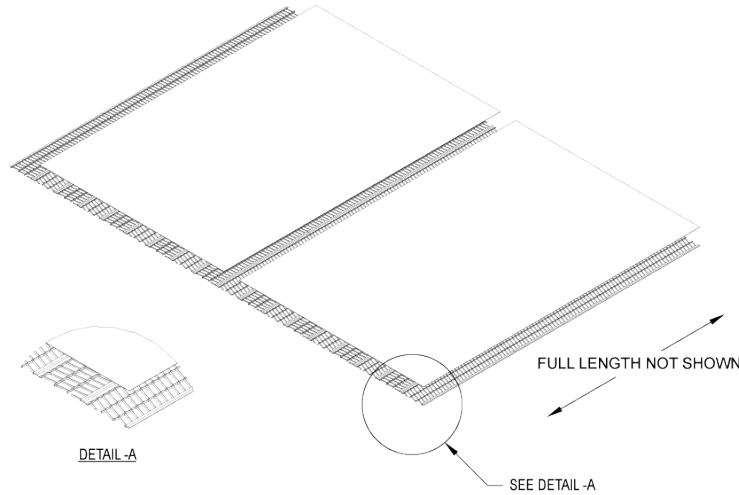

ASTM's and Code Standards

- ASTM A653
- ASTM A924
- ASTM C841 (Installation)
- ASTM C847
- ICC ESR-1623
- Fed. Spec. QQ-1-101C

LEED Points and Recycled Content

By using CEMCO metal lath products, your project can contribute to earning LEED points for:

- LEED MR 2.1 and 2.2: Construction Waste Management: Up to 2 points.
- LEED MR 4.1 and 4.2: Recycled Content: Up to 2 points.
- LEED MR 5.1 & 5.2: Regional Materials

CEMCO metal lath products contain 30% to 35% recycled steel.

These products are produced from steel consisting of the following contents:

- Total Recycled Content: 32.9%
- Post-Consumer Content: 25.6%
- Pre-Consumer Content: 6.8%
- CEMCO can provide higher recycled content based on blending steel. Please refer to SSMA Tech dated May 2009 to calculate recycled content on blended steel.
- Link to SSMA Tech Note dated May 2009 on LEED® 2.2 Credits for Cold-Formed Steel Framing Manufacturers: <http://www.ssma.com/documents/TN06%20SSMA%20LEED%202.2.pdf>

CEMCO's CEMMESH Flat-Rib with K-Paper is a more rigid lath with 1/8" longitudinal ribs spaced at 3" on-center that provide for wider spacing between wooden or metal supports. Backed with 2 strips of K-Paper, this lath is ideal for machine applied plaster. Small openings provide excellent keying for plaster.

Packaging

Length	Spacing	Wt./Sq. Yd (lbs)	Sheet Size	Pcs./Bdl.	Yds./Bdl.	Yds./Pallet
4'	16"	2.00	27" x 48"	10	10	500
8'	24"	2.00	27" x 96"	10	20	1000



Technical Services

For more technical information about this and other CEMCO products, contact Technical Services at 800.416.2278

Project Information

Name: _____
Project: _____

Contractor Information

Name: _____
Contact: _____
Phn: _____ FAX: _____

Architect Information

Name: _____
Contact: _____
Phn: _____ FAX: _____