




The Innovators of Quality Framing and Lath Systems

DRYWALL SURE-BOND "L" METAL

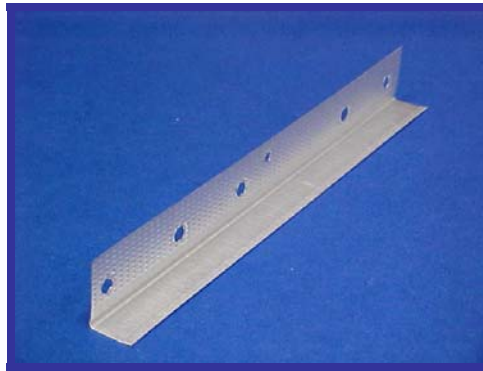

SIZE	Wt. / MLF	Pcs. / Ctn.	Feet / Ctn.	Ctn. / Pallet	Wt. / Ctn.
1/2" x 8'	90 lbs.	70	600'	20	53 lbs.
1/2" x 10'	90 lbs.	56	600'	20	53 lbs.
5/8" x 8'	90 lbs.	70	600'	20	53 lbs.
5/8" x 10'	90 lbs.	56	600'	20	53 lbs.

CEMCO Drywall "SURE-BOND" "L" Metal is used as drywall casing, available in two grounds, which provides a neat exterior finished look for drywall corners and edges. This product is fabricated from 0.013-inch-thick (30 gauge) hot-dipped galvanized steel, complying with ASTM A653. Flanges are knurled and punched to help hold joint compound. This product complies with ASTM C1047. Galvanized steel coating conforms with ASTM A924.

CALIFORNIA EXPANDED METAL LATH PRODUCTS CO.

Corporate Office
263 N. Covina Lane,
City of Industry, CA 91744
Phone (800) 775-2362
Fax (626) 330-7598

1001-A Pittsburg Antioch Hwy,
Pittsburg, CA 94565
Phone (925) 473-9340
Fax (925) 473-9341

490 Osage Street,
Denver, CO 80204
Phone (303) 572-3626
Fax (303) 572-3627

www.cemcosteel.com